



RL41

CAGED ACCESS LADDER WITH GRABRAILS

The perfect solution for application heights over 3m, where standards require fall protection. Constructed of aluminum, these caged access ladders are lightweight, sturdy and non-corrosive. As with all of our products, KATT CLIMB caged access ladders meet required BS standards and relevant HSE guidelines, but they are also ergonomically designed for user comfort as well as safety.

KEY FEATURES

Welded aluminium construction

Providing sturdy, secure, and reliable access.

Lightweight

Enabling simple and quick installation, saving you and your employees time and effort.

Modular system

Ensures easy assembly & delivery.

Cost effective


Non-corrosive and maintenance free.

Safe and easy to use

Providing you with peace of mind that your employees are protected.

Compliant with standards

BS4211:2005 & BS EN ISO 14122-4:2016

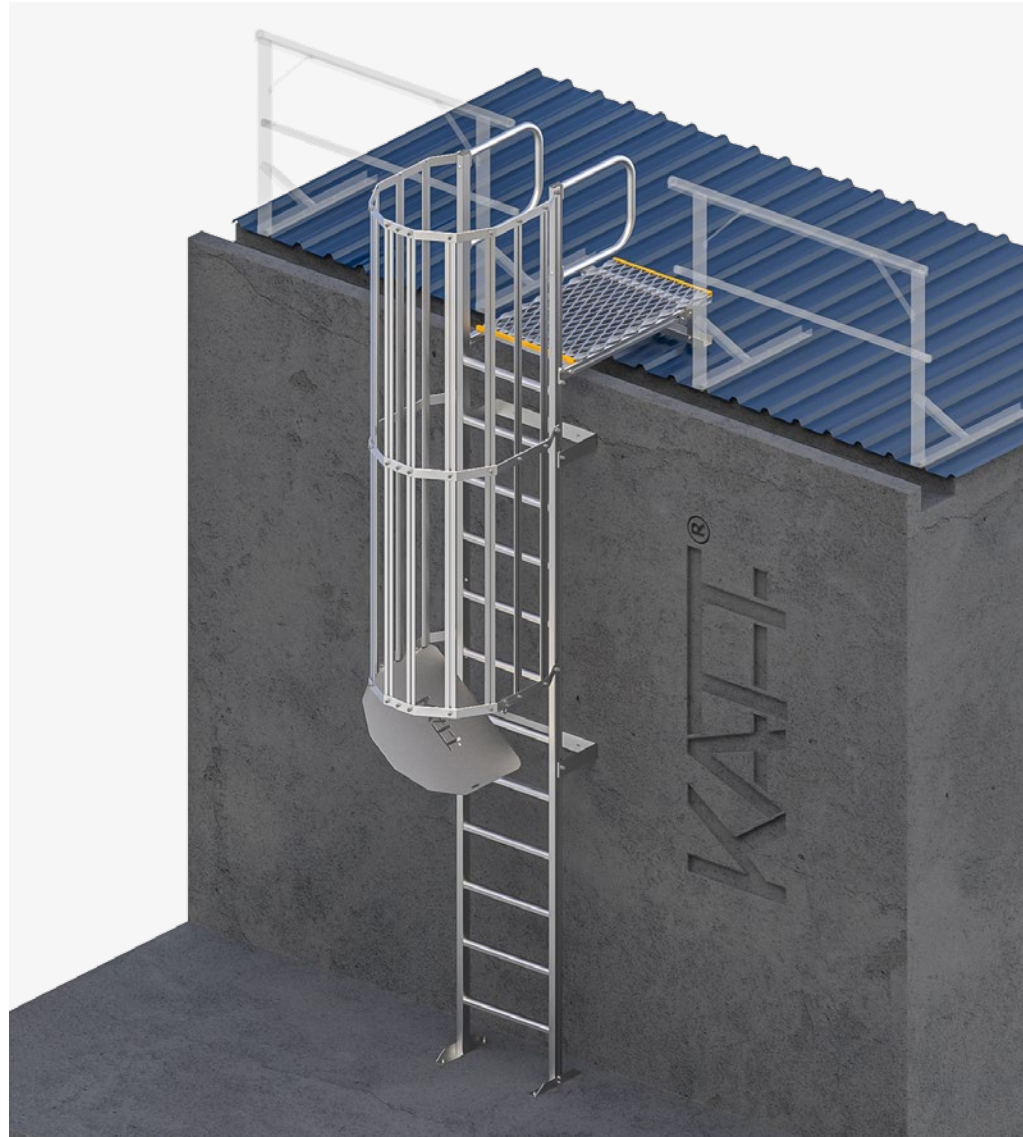

APPLICATIONS

- Primary access from ground to roof area
- Lower roofs to upper roofs
- Plant platform access

We provide you with access solutions guaranteed to make your work easier





KITS

Ladder exit type	1.0m adjustable landing with grabrails	280mm bridging plate with grabrails	1.0m fixed landing with grabrails
Height up to 2,550mm	RL41.SA10.0255	RL41.SF04.0255	RL41.SF10.0255
Height up to 3,750mm	RL41.SA10.0375	RL41.SF04.0375	RL41.SF10.0375
Height up to 4,950mm	RL41.SA10.0495	RL41.SF04.0495	RL41.SF10.0495
Height up to 6,150mm	RL41.SA10.0615	RL41.SF04.0615	RL41.SF10.0615
Height up to 7,350mm	RL41.SA10.0735	RL41.SF04.0735	RL41.SF10.0735
Height up to 8,550mm	RL41.SA10.0855	RL41.SF04.0855	RL41.SF10.0855
Height up to 9,750mm	RL41.SA10.0975	RL41.SF04.0975	RL41.SF10.0975
Compliance	All KATT® Ladder Systems are designed to comply with requirements of BS4211:2005 & BS EN ISO 14122-4:2016 and relevant statutory HSE guidelines.		
Working load limit	<ul style="list-style-type: none"> ■ Recommended for single person use – 150kg rated ■ Industrial rated, suited to high frequency usage 		

- These ladders are modular
- Over-length ladders are trimmed to suit site conditions
- Heights stated are measured to the exit point
- ISO 14122-4 states that a single flight ladder >3,000mm and <10,000mm shall be equipped with a safety cage or fall arrester

For assistance with product selection or for advice on requirements for a specific project please contact KATT Safety.

OPTIONS AND EXTRAS

Ladder mounting


We offer 3 types of mounts for full stability of your fixed access ladder.

1. Standard floor mounts
2. Non-penetrating base plates
3. Off-floor mounted fixing brackets

Neither option will penetrate the roofing substrate, and the off-floor bracket keeps the ladder off the roof entirely, affixing it to the wall instead.

Security solutions

- They fit easily onto compatible KATT Climb® ladders

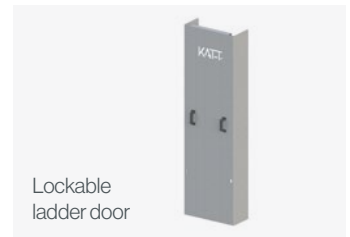

FURTHER INFORMATION

Each ladder is provided with all necessary fasteners and attachment hardware. By cutting the lower ladder body to the required length, the system can be built to suit exact site requirements.

Often, prefabricated ladders are delivered to site and the critical dimensions, or the spacing of fixing brackets, are incorrect. This results in additional costs and time delays whilst the fabrication is adjusted.

With the modular KATT® Ladder System, you simply build the kit to suit the site layout.

Protecting life by providing permanent
Safe Access Systems

0800 0590 400

kattsafety.co.uk

