



# RL53

## VERTICAL LINE LADDER WITH PARAPET PLATFORM

Modular vertical line fall arrest ladder with grabrails, parapet platform and 1m landing. Brilliant option when your building has roof top parapet. Constructed of high grade structural aluminum, the fall arrest access ladders are lightweight, sturdy and non-corrosive and offer constant fall protection at any point on the ladder.

### KEY FEATURES

**Welded aluminium construction**

Providing sturdy, secure, and reliable access.

**Lightweight**

Enabling simple and quick installation, saving you and your employees time and effort.

**Modular system**

Ensures easy assembly & delivery.

**Cost effective**

Non-corrosive and maintenance free.

**Safe and easy to use**

Providing you with peace of mind that your employees are protected.

**Compliant with standards**

BS4211:2005 & BS EN ISO 14122-4:2016



### FALL ARREST SYSTEMS ADVANTAGES

- Constant fall protection at any point on the ladder
- Minimal Floor footprint required for ladder
- Simple to use by competent personnel

We provide you with access solutions guaranteed to make your work easier.





## KITS

Ladder exit type	1.0m adjustable walkway	2.4m adjustable walkway	3.0m adjustable walkway
Height up to 3750mm	RL53.WA10.0375	RL53.WA24.0375	RL53.WA30.0375
Height up to 4950mm	RL53.WA10.0495	RL53.WA24.0495	RL53.WA30.0495
Height up to 6150mm	RL53.WA10.0615	RL53.WA24.0615	RL53.WA30.0615
Height up to 7350mm	RL53.WA10.0735	RL53.WA24.0735	RL53.WA30.0735
Height up to 8550mm	RL53.WA10.0855	RL53.WA24.0855	RL53.WA30.0855
Height up to 9750mm	RL53.WA10.0975	RL53.WA24.0975	RL53.WA30.0975
Compliance	All KATT® Ladder Systems are designed to comply with requirements of BS4211:2005 & BS EN ISO 14122-4:2016 and relevant statutory HSE guidelines.		
Working load limit	<ul style="list-style-type: none"> <li>■ Recommended for single person use – 150kg rated</li> <li>■ Industrial rated, suited to high frequency usage</li> </ul>		

- These ladders are modular
- Over-length ladders are trimmed to suit site conditions
- Heights stated are measured to the exit point
- ISO 14122-4 states that a single flight ladder >3,000mm and <10,000mm shall be equipped with a safety cage or fall arrester

For assistance with product selection or for advice on requirements for a specific project please contact KATT Safety.

## OPTIONS AND EXTRAS

### Ladder mounting


We offer 3 types of mounts for full stability of your fixed access ladder.

1. Standard floor mounts
2. Non-penetrating base plates
3. Off-floor mounted fixing brackets

Neither option will penetrate the roofing substrate, and the off-floor bracket keeps the ladder off the roof entirely, affixing it to the wall instead.

### Security solutions

- They fit easily onto compatible KATT Climb® ladders

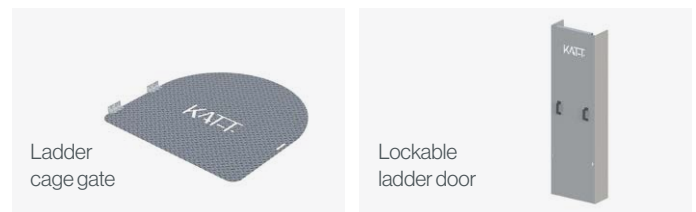

## FURTHER INFORMATION

Each ladder is provided with all necessary fasteners and attachment hardware. By cutting the lower ladder body to the required length, the system can be built to suit exact site requirements.

Often, prefabricated ladders are delivered to site and the critical dimensions, or the spacing of fixing brackets, are incorrect. This results in additional costs and time delays whilst the fabrication is adjusted.

With the modular KATT® Ladder System, you simply build the kit to suit the site layout.

Protecting life by providing permanent  
**Safe Access Systems**

**0800 0590 400**

kattsafety.co.uk

